

RGBWW Matrix Space Light

Full-color Matrix Spotlight
Space Light

Wireless Pixel Tube

T18 / T36C Pixel Tube

Skymat 350C

Skymat 260B

Full Color Air Light

LumenRadio Signaler E360

CATALOGUE

 **PHEON LUX**[®]

COMPANY PROFILE

DONGGUAN HUIGUAN CULTURE TECHNOLOGY CO., LTD.

Dongguan HuiGuan Culture Technology Co., Ltd. is located in Dongguan City, Guangdong Province, is a professional film and television, LED film and television lights , spotlights, photography accessories, etc., Research and development, production, sales and service of high-tech private enterprises. Since its inception, We focused on user experience, taking the actual needs of professional film and television lighting sources and the development trend of the film and television industry as important development opinions to develop new products. HuiGuan Culture Technology focuses on talent training and team building of professionals, the company has gathered experienced film and television lighting experts, R&D experts, engineers. Humble commitment to "HuiGuan new equipment, innovation without end! " for the enterprise R&D policy, a variety of lighting products have passed the EU CE certification and ROHS certification. With good quality in the market has won the trust of the majority of users, as well as a good reputation of service in place. In the future, HuiGuan will work harder, and your concern will make HuiGuan even better! We look forward to your attention and cooperation with you!

www.huiguanwenhua.com



Wechat Public Account



Official Website



APP Download

COMPANY HONOR



SUNSHINE RGBWW MATRIX LED SPACE LIGHT

Professional light for film and television



 <p>ALL-WEATHER PROTECTION LEVEL Effective dustproof and rainproof and other special environment</p>	 <p>SUPPORTS MULTIPLE DIMMING CURVES Exponential logarithmic linear and other dimming modes</p>	 <p>VISUAL OPERATING SYSTEM Intuitive interface, full color visualization</p>	 <p>MATRIX DIY DESIGN Each head can be disassembled, it can be spliced flexibly and combined freely</p>
 <p>APP CONTROL SYSTEM App control system Self-developed control system, support iOS, Android system</p>	 <p>OTA APP control system supports firmware remote upgrade</p>	 <p>LUMENRADIO Built-in international wireless LumenRadio communication module. Efficient and stable anti-interference</p>	 <p>EFFICIENT CONVERSION OF ELECTRICAL ENERGY TO LIGHT High-brightness white color output, strong RGBWW performance</p>
 <p>CCT 2,700-10,000K</p>	 <p>DIMMING RANGE Dimming: 0-100%</p>	 <p>COLOR RENDERING INDEX CRI/TLCI ≥ 95</p>	 <p>GEL Built-in a variety of colored paper</p>
 <p>LIGHTING SIMULATION A variety of special light analog output</p>	 <p>MULTIPLE COMMUNICATION CONTROL PROTOCOL CRMX/ WIFI /2.4G /Wired DMX512</p>	 <p>QUIET DESIGN Fanless ultra-quiet design</p>	 <p>RGBWW Selection RGBWW</p>

RGBWW HIGH OUTPUT LED SPOTLIGHT

It can be controlled over the dimmer, Wireless DMX, LumenRadio and the free SUNSHINE app.

G/M Balance +-100%
Adjustment-Calibrate Set Lighting

CCT 2,700K-10,000K
Wide CCT, Switch Freely

Stepless Dimming 0-100%
Smooth & Accurate

CRI / TLCI ≥ 95
Color Mixing Technology



VARIETY OF SHAPES, EASY TO SHOW THE CHARM OF LIGHTING

Support angle adjustment, realize all-round and multi-angle lighting needs, multi-purpose, convenient and fast.



ALLOY MATERIAL, ROCK SOLID AND DURABLE

Thick aluminum alloy material is more conducive to heat dissipation, and ensure that the space light is hard and not easy to deform.


ALL-WEATHER PROTECTION LEVEL

Effective dustproof and rainproof and other special environment.




MATRIX DIY DESIGN

Each head can be disassembled, it can be spliced flexibly and combined freely. The replacement and damage of individual head will not affect other heads, convenient for maintenance.

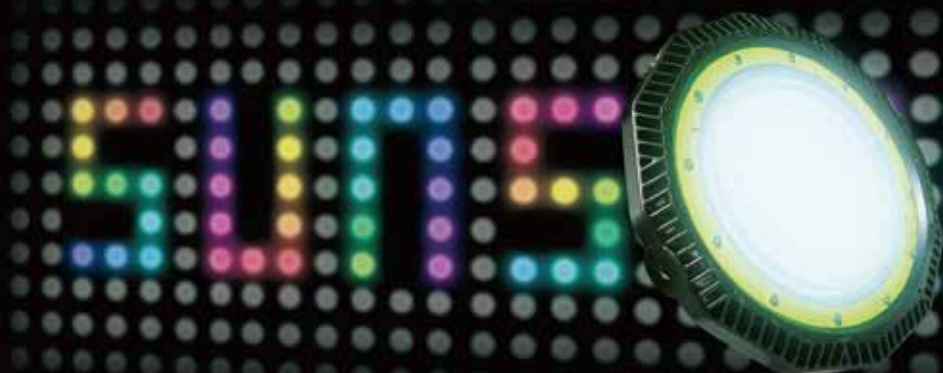


VARIOUS DIMMING CURVES



Linear curve

smooth and even proportional brightness adjustment.



Exponential curve

can be finely adjusted in low-light areas, with cameras with increasing sensitivity.



Alignment curve


simulate the dimming curve of the lamp, finely adjust in the strong light area.

FULL COLOR LIGHTING EFFECT, THE KING OF ATMOSPHERE



HUE+SAT color mode
Unimaginable 36,000 colors,
Add color to the creation.

RGBWW (Parametric Dimming)
16 million colors, closer to the
sunlight spectrum.

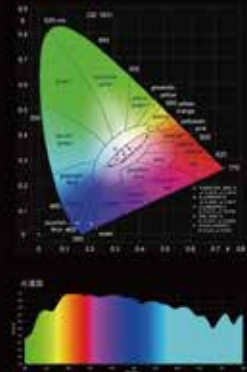

The APP built-in 600+ electronic colored papers,
no need to carry colored papers.
Freely change brightness without brightness loss.



VARIOUS LIGHTING SIMULATION EFFECTS

 Paparazzi	 Fire	 Copcar	 Color streamers	 Random color
 Rainbow	 Storm	 Shortout	 Random Streamers	 Starlight
 One-way streamer	 Back and forth flow of light	 Stack up	 music1	 music2

DMX512 CONTROL SYSTEM

Support Wireless / Wired DMX512 System,
PC, Phone Software Control, Support Bluetooth .

DMX512

+ Wired/Wireless

Master/Slave Control,

Console Control

Remote Controller

APP Control


PC Control

.....

APP CONTROL SYSTEM

Self-developed control system,
Visual full-color operation
interface,Support IOS, Android
system.



 **lumenradio**

Built-in international wireless LumenRadio
communication module,
Efficient and stable anti-interference.

RGBWW Matrix Space Light Technical Parameter

Item	S4-C	S6-C	S9-C	S12-C
Lamp Head	4	6	9	12
Input Voltage	AC100-240V 50-60 Hz	AC100-240V 50-60 Hz	AC100-240V 50-60 Hz	AC100-240V 50-60 Hz
National grid interface	powerCON TRUE1 TOP	powerCON TRUE1 TOP	powerCON TRUE1 TOP	powerCON TRUE1 TOP
Power consumption	White:680W Red:480W Green: 600W Blue:600W	White:1005W Red:720W Green: 900W Blue:900W	White:1495W Red:1080W Green: 1350W Blue:1350W	White:1980W Red:1440W Green: 1800W Blue:1800W
White Color	2,700-10,000K continuous variable correlated CCT	2,700-10,000K continuous variable correlated CCT	2,700-10,000K continuous variable correlated CCT	2,700-10,000K continuous variable correlated CCT
RGB	Wide Color Gamut Color Mode: CCT, HSI,Independent Color,Colored paper pattern,Light Source Matching,Light effect Mode	Wide Color Gamut Color Mode: CCT, HSI,Independent Color,Colored paper pattern,Light Source Matching,Light effect Mode	Wide Color Gamut Color Mode: CCT, HSI,Independent Color,Colored paper pattern,Light Source Matching,Light effect Mode	Wide Color Gamut Color Mode: CCT, HSI,Independent Color,Colored paper pattern,Light Source Matching,Light effect Mode
Color Rendering	Average CRI>95, Average TLCI >97	Average CRI>95, Average TLCI >97	Average CRI>95, Average TLCI >97	Average CRI>95, Average TLCI >97
Beam angle	Bare lamp half peak 80°	Bare lamp half peak 80°	Bare lamp half peak 80°	Bare lamp half peak 80°
Dimming	0-100% continuous smooth Dimming	0-100% continuous smooth Dimming	0-100% continuous smooth Dimming	0-100% continuous smooth Dimming
Control Mode	Single light control,2.4G master-slave control, APP control, CRMX control, Console wired control,Remote control 2.4G control	Single light control,2.4G master-slave control, APP control, CRMX control, Console wired control,Remote control 2.4G control	Single light control,2.4G master-slave control, APP control, CRMX control, Console wired control,Remote control 2.4G control	Single light control,2.4G master-slave control, APP control, CRMX control, Console wired control,Remote control 2.4G control
Cover Color	Black / Avocado Green	Black / Avocado Green	Black / Avocado Green	Black / Avocado Green
Size(Lamp Body)	99x96.8x18.5cm	131.8x102.5x18.5cm	134.3x131.8x18.5cm	164x131.8x18.5cm
Weight(Yoke included)	29kg	38kg	51kg	62kg
Operation	high strength pitch lock Anti-lock device	high strength pitch lock Anti-lock device	high strength pitch lock Anti-lock device	high strength pitch lock Anti-lock device
Installation	28mm casing small connector	28mm casing small connector	28mm casing small connector	28mm casing small connector
Pitch Angle	Overall 360°rotation The lamp head rotates 30°left and right	Overall 360°rotation The lamp head rotates 30°left and right	Overall 360°rotation The lamp head rotates 30°left and right	Overall 360°rotation The lamp head rotates 30°left and right
White Cover Size	Diameter 80cm x H100cm	Diameter 80cm x H100cm	Diameter 80cm x H100cm	Diameter 80cm x H100cm
Black Cover Size	Diameter 85cm x H110cm	Diameter 85cm x H110cm	Diameter 85cm x H110cm	Diameter 85cm x H110cm
Working temperature	' -20°C~40°C	' -20°C~40°C	' -20°C~40°C	' -20°C~40°C
LED life expectancy (Brightness not less than 70%)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
IP Rate	IP40	IP40	IP40	IP40

FULL-COLOR MATRIX SPOTLIGHT SPACE LIGHT



HIGH-PRECISION SPOTLIGHT BEAD CRAFTSMANSHIP, STRONGER ILLUMINATION, LONGER IRRADIATION DISTANCE



- Adjustable G/M \pm 100 red-green balance; a wide range of color temperatures from 2700K to 10000K; 0% to 100% stepless dimming.
- High CRI/TLCI \geq 95 high color rendering and a variety of dimming curve options.
- HUE+SAT color adjustment mode, RGBWY (parameter dimming) with 16 million color options.
- Built-in 600+ electronic color GEL in the app for flexible and convenient color adjustments.
- Multiple built-in effects, making it easy to create various atmospheres and lighting effects without the need for a console, reducing the complexity of creative work. Effects include flickering, paparazzi, short circuit, police lights, flames, rainbow, and more.
- Various control methods: single lamp, master-slave, remote control, app, console, and computer (Madrix software).
- Intuitive and user-friendly interface design: easy management of light groups, scene presets, and dynamic settings, making it effortless to handle.



Full-color Matrix Spotlight Space Light Technical Parameter

Item	H4-C	H6-C	H9-C	H12-C
Lamp Head	4	6	9	12
Input Voltage	AC100-240V 50-60 Hz	AC100-240V 50-60 Hz	AC100-240V 50-60 Hz	AC100-240V 50-60 Hz
National grid interface	powerCON TRUE1 TOP	powerCON TRUE1 TOP	powerCON TRUE1 TOP	powerCON TRUE1 TOP
Power consumption	White:680W Red:480W Green: 600W Blue:600W	White:1005W Red:720W Green: 900W Blue:900W	White:1495W Red:1080W Green: 1350W Blue:1350W	White:1980W Red:1440W Green: 1800W Blue:1800W
White Color	2,700-10,000K continuous variable correlated CCT	2,700-10,000K continuous variable correlated CCT	2,700-10,000K continuous variable correlated CCT	2,700-10,000K continuous variable correlated CCT
RGB	Wide Color Gamut Color Mode: CCT, HSI,Independent Color,Colored paper pattern,Light Source Matching,Light effect Mode	Wide Color Gamut Color Mode: CCT, HSI,Independent Color,Colored paper pattern,Light Source Matching,Light effect Mode	Wide Color Gamut Color Mode: CCT, HSI,Independent Color,Colored paper pattern,Light Source Matching,Light effect Mode	Wide Color Gamut Color Mode: CCT, HSI,Independent Color,Colored paper pattern,Light Source Matching,Light effect Mode
Color Rendering	Average CRI>95, Average TLCI >97	Average CRI>95, Average TLCI >97	Average CRI>95, Average TLCI >97	Average CRI>95, Average TLCI >97
Beam angle	Wide Angle 15°	Wide Angle 15°	Wide Angle 15°	Wide Angle 15°
Dimming	0-100% continuous smooth Dimming	0-100% continuous smooth Dimming	0-100% continuous smooth Dimming	0-100% continuous smooth Dimming
Control Mode	Single light control,2.4G master-slave control, APP control, CRMX control, Console wired control,Remote control 2.4G control	Single light control,2.4G master-slave control, APP control, CRMX control, Console wired control,Remote control 2.4G control	Single light control,2.4G master-slave control, APP control, CRMX control, Console wired control,Remote control 2.4G control	Single light control,2.4G master-slave control, APP control, CRMX control, Console wired control,Remote control 2.4G control
Cover Color	Black / Gun color	Black / Gun color	Black / Gun color	Black / Gun color
Size(Lamp Body)	99x96.8x18.5cm	131.8x102.5x18.5cm	134.3x131.8x18.5cm	164x131.8x18.5cm
Weight(Yoke included)	29kg	38kg	51kg	62kg
Operation	high strength pitch lock Anti-lock device	high strength pitch lock Anti-lock device	high strength pitch lock Anti-lock device	high strength pitch lock Anti-lock device
Installation	28mm casing small connector	28mm casing small connector	28mm casing small connector	28mm casing small connector
Pitch Angle	Overall 360°rotation The lamp head rotates 30°left and right	Overall 360°rotation The lamp head rotates 30°left and right	Overall 360°rotation The lamp head rotates 30°left and right	Overall 360°rotation The lamp head rotates 30°left and right
White Cover Size	Diameter 80cm x H100cm	Diameter 80cm x H100cm	Diameter 80cm x H100cm	Diameter 80cm x H100cm
Black Cover Size	Diameter 85cm x H110cm	Diameter 85cm x H110cm	Diameter 85cm x H110cm	Diameter 85cm x H110cm
Working temperature	' -20°C~40°C	' -20°C~40°C	' -20°C~40°C	' -20°C~40°C
LED LED life expectancy (Brightness not less than 70%)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
IP Rate	IP40	IP40	IP40	IP40

Wireless Pixel Tube Technology or Operation Experience, All Upgraded

Beautiful, Easy To Use, More Practical



CCT
2700K - 10000K



Dimming
0-100%



CRI/TLCI
CRI/TLCI ≥ 95%



G/M Balance
±100%可调



Power Mode
Battery Internal



Special Effects
Varied



Pixel Effects
Varied



Wireless Control
APP/ Remote control
PC/ Master-slave/ Console

Comes with a soft light surface for soft light without a soft light accessory

Can hide light, a linear light like a mirror,
providing infinite possibilities for creation

G/M ±100

Adjustment-Calibrate
Set Lighting

2700K-10000K

Wide CCT, Switch Freely

0%-100%

Stepless Dimming,
Smooth & Accurate

CRI/TLCI > 95%

Color Mixing Technology





HUE+SAT color mode

Unimaginable 36,000 colors
 RGBWY (parametric dimming) ,
 16 million colors
 The APP built-in 600+ electronic
 colored papers
 no need to carry colored papers
 Freely change brightness
 without brightness loss

Special Effect Mode

With a variety of built-in special effects, you can easily create various atmospheres and lighting effects without a console



storm



paparazzi



short circuit



police light



flame



Rainbow



Built-in Pixel Effect for more creativity



rainbow flowing



One-way streamer



round-trip streamer



Double streamer



music 1



music 2



random color



random streamer



starlight



mode2



stack



color jump



color streamer

Control Mode

Single tube control / master-slave /remote control /APP
/console/ computer (madrix software)

Rich and flexible control methods bring high creative freedom
Pixel-level control, unlimited control experience,
and bring creativity into reality.



Built-in battery

Anytime, anywhere, wonderful performance. Powered by AC adapter in available configuration
It can also be powered by the built-in lithium battery when there is no power supply
Up to 2-3 hours of battery life, easy to solve outdoor shooting




Various Dimming Curves



Linear curve:
smooth and even
proportional
brightness
adjustment



Exponential curve:
can be finely adjusted in
low-light areas, with
cameras with increasing
sensitivity



Alignment curve:
simulate the dimming
curve of the lamp,
finely adjust in the
strong light area

Intuitive and easy APP interface design

Light grouping, scene presets, dynamic settings

Wireless programming via APP, wireless LumenRadio or wired DMX, making it flexible to meet your setup requirements.

In the APP, you can write pipelines to remember complex scenes, repeatedly and quickly create groups of lights and assign positions to them. Attached DMX/RDM technology to support wireless upgrade of equipment.



Wireless Pixel Tube Technical Parameter

Item	T16M	T32M	T64M
Color	RGBW W	RGBW W	RGBW W
Power	16W	32W	64W
Size (mm)	38.5*600	38.5*1200	38.5*2400
Lux	220lux@1m	350lux@1m	500lux@1m
CRI	≥95	≥95	≥95
Angle	120° (Field of view180 °)	120° (Field of view180 °)	120° (Field of view180 °)
Quantity	8 Pixels	16 Pixels	32 Pixels
Battery life	After 300 cycles the remaining 70%		
Battery running time	Up to 20 hours (maximum power 2.5 hours)		
LED Lifetime	50000 Hours	50000 Hours	50000 Hours
Charging time	3Hours	4Hours	5Hours
Input Voltage	5V-20V	5V-20V	5V-20V
Wireless module	2.4GHZ	2.4GHZ	2.4GHZ
Wired DMX	Yes	Yes	Yes
CRMX Receiver	Built-in	Built-in	Built-in
Support protocols	CRMX/G3/G4S/Wifi/Artnet	CRMX/G3/G4S/Wifi/Artnet	CRMX/G3/G4S/Wifi/Artnet
Shell material	PC / Aluminum alloy	PC / Aluminum alloy	PC / Aluminum alloy
IP Rating	IP65	IP65	IP65
Operating temperature	-20°C-40°C	-20°C-40°C	-20°C-40°C
Lamp weight	0.43KG	0.9KG	1.55KG
Environment	Indoor /Outdoor	Indoor/Outdoor	Indoor/Outdoor

T18C / T36C Pixel Tube



- Adjustable G/M \pm 100 red-green balance; a wide range of color temperatures from 2700K to 10000K; 0% to 100% stepless dimming.
- High CRI/TLCI \geq 95 high color rendering and a variety of dimming curve options.
- HUE+SAT color adjustment mode, RGBWY (parameter dimming) with 16 million color options.
- Built-in 600+ electronic color GEL in the app for flexible and convenient color adjustments.
- Multiple built-in effects, making it easy to create various atmospheres and lighting effects without the need for a console, reducing the complexity of creative work. Effects include flickering, paparazzi, short circuit, police lights, flames, rainbow, and more. Various control methods: single lamp, master-slave, remote control, app, console, and computer (Madrix software).
- Intuitive and user-friendly interface design: easy management of light groups, scene presets, and dynamic settings, making it effortless to handle.

Control Mode

Single tube control • master-slave • remote control • APP console • computer (madrix software)

Rich and flexible control methods bring high creative freedom

Pixel-level control, unlimited control experience,
and bring creativity into reality.





T18C/T36C Technical parameters

Item	T18C	T36C
Power	18W	36W
Lamp Type	RGBWW	
Lux	270lux@1m	430lux@1m
CRI/TLCT	CRI > 95, TLCI > 97	
DC Input	DC 20V/2.4A	
Lamp weight	0.725KG	1.17KG
Size (mm)	38.5*600	38.5*1200
Angle	120° (Field of view 180°)	
Quantity	8 Pixels	16 Pixels
Battery life	After 300 cycles the remaining 70%	
Battery running time	T18C 2.5 hours, T36C 1.5 hours	
LED Lifetime	10000hours	
Charging time	3hours	4hours
Wireless Interface	Wi-Fi, 2.4G	
Control Options	On-Board Controller, APP Controller WIFI Controller, 2.4G Controller, DMX 512	
Support protocols	WIFI/ Art-Net	
Shell material	PC / Aluminum alloy	
DC Connector	5.5mm*2.5mm	
IP Rating	IP20	
Working temperature	-20°C-40°C	


F350C

- Adjustable G/M \pm 100 red-green balance; a wide range of color temperatures from 2700K to 10000K; 0% to 100% stepless dimming.
- High CRI/TLCI \geq 95 high color rendering and a variety of dimming curve options.
- HUE+SAT color adjustment mode, RGBWY (parameter dimming) with 16 million color options.
- Built-in 600+ electronic color GEL in the app for flexible and convenient color adjustments.
- Multiple built-in effects, making it easy to create various atmospheres and lighting effects without the need for a console, reducing the complexity of creative work. Effects include flickering, paparazzi, short circuit, police lights, flames, rainbow, and more. Various control methods: single lamp, master-slave, remote control, app, console, and computer (Madrix software).
- Intuitive and user-friendly interface design: easy management of light groups, scene presets, and dynamic settings, making it effortless to handle.

Skymat F350C




Product Indication:




light



light with skirt fabric and soft hood




light with skirt fabric ,soft hood and egg lattice



Controller

Product folding:



Step ①



Step ②



complete

Skymat F350C Technical parameters

Voltage Input Range	100 - 220V, 50 - 60 Hz
Power Consumption	MAX 3500W
Pixels	1600 Pixels
Lamp Type	RGBWW
White Light	2700K~10000K continuously adjustable
Colored Light	Full RGB color gamut with Hue and Saturation control
Color Rendering	Average CRI>95, Average TLCI >97
Green-Magenta-Adjustment	Continuously adjustable (Full Minus- to Full Plusgreen)
Dimming	0-100% continuous smooth Dimming
Wireless Interface	Wi-Fi , 2.4G , LumenRadio, CRMX
Control Options	On-Board Controller , APP Controller, 2.4G Controller , CRMX Controller , DMX 512, Art-Net
Connectors	1x AC powerCON 32A , 2x DMX (In and out) XLR-5pin , 2x LAN/Ethernet, RJ45 , 1x USB Type-A
Size(Lamp Body)	3m*3m
Weight	24.41kg
Working Temperature	-20°C- 40°C
IP Rate	IP20
LED Life Expectancy	20,000 hours



F260B



- A wide range of color temperatures from 2700K to 10000K; 0% to 100% stepless dimming.
- High CRI/TLCI ≥ 95 high color rendering and a variety of dimming curve options.
- Multiple built-in effects, making it easy to create various atmospheres and lighting effects without the need for a console, reducing the complexity of creative work. Effects include flickering, paparazzi, short circuit, police lights, flames, rainbow, and more.
- Various control methods: single lamp, master-slave, remote control, app, console, and computer (Madrix software).
- Intuitive and user-friendly interface design: easy management of light groups, scene presets, and dynamic settings, making it effortless to handle.

Skymat F260B Technical parameters

Voltage Input Range	100 - 220V, 50 - 60 Hz
Power consumption	MAX 2600W
Lamp Type	WW
Light source	High and low color temperature
CCT	2700K~6500K
Color Rendering	CRI>95 ,TLCI>97
Dimming	0-100% continuous smooth Dimming
Wireless Interface	Wi-Fi,2.4G,LumenRadio (CRMX)

Control Options	n-Board Controller , APP Controller, 2.4G Controller , CRMX Controller , DMX 512, Art-Net
Connectors	1xAC powerCON 32A , 2xDMX(In and out) XLR-5pin, 2xLAN/Ethernet, RJ45, 1xUSB Type-A
Size(Lamp Body)	3.6m*3.6m
Weight	26.5kg
Working temperature	-20°C-40°C
IP Rate	IP20
LED life expectancy	20,000 hours



PHEON LUX®

Air Column Lamp

-  CCT
2700K ~ 10000K
-  Full Color
RGBWW
-  Dimming
0-100%
-  Effect
Special Light Effect
-  Color Rendering Index
CRI 98
-  GEL
Built-in Color Paper
-  APP Control
IOS & Android
-  Visual operating system
Direct and Visible

Full Color Air Column Lamp

Light Source	RGBWW		
CCT	2700k—10000k		
Lux	H14-C 0.5m 1520lux	1m 574lux	2m 188lux
	H18-C 0.5m 1590lux	1m 767lux	2m 287lux
Watt	H14-C 90W	H18-C 180W	
Beam Angle	210°		
Color Rendering Index	>95		
Airlight Size	H14-C 1250mm*250mm		H18-C 2150mm*250mm
Airlight Weight	H14-C 0.69kg		H18-C 1.27kg
Controller Size	126*150*201mm		
Controller Weight	1.664kg		
Brightness Dimming	0%-100%		
CCT Adjust	2700k-10000k		
DMX Input/ Output	XLR 5 pin		

Support Wireless App Control , Wireless DMX Control (Need to buy a DMX Wireless Controller)





PHEON LUX[®]

Air Cushion Lamp

-  CCT
2700K ~ 10000K
-  Full Color
RGBWW
-  Dimming
0-100%
-  Effect
Special Light Effect
-  Color Rendering Index
CRI 98
-  GEL
Built-in Color Paper
-  APP Control
IOS & Android
-  Visual operating system
Direct and Visible

Full Color Air Cushion Lamp

Light Source	RGBWW
CCT	2700k—10000k
Lux	H22-C (6000K) 0.5m 2580lux, 1m 843lux, 2m 251lux H24-C (6000K) 0.5m 3440lux, 1m1320lux, 2m444lux H28-C (6000K) 0.5m 4010lux, 1m1950lux, 2m732lux H44-C (6000K) 0.5m 5350lux, 1m2450ux, 2m831lux
Watt	H22-C 100w ; H24-C 180w ; H28-C 380w; H44-C 380w
Beam Angle	210°
Color Rendering Index	>95
Airlight Size	H22-C 670*670*180mm H24-C 1230*670*180mm H44-C 1230*1230*180mm H28-C 2200*680*150mm
Airlight Weight	H22-C 1kg ;H24-C 1.57kg ; H28-C 2.8kg ; H44-C 3kg
Controller Size	small 126*152*200mm; big 159*141*315mm
Controller Weight	small 1.664kg; big 2.785kg
Brightness Dimming	0%-100%
CCT Adjust	2700k-10000k
DMX Input/ Output	XLR 5 pin

Support Wireless App Control , Wireless DMX Control (Need to buy a DMX Wireless Controller)



LumenRadio Signaler E360



Multi-protocol support Control lights at will

Support ArtNet , CRMX , DMX , HuiGuan 2.4G, easily connect to console, computers, iPads and devices with LumenRadio modules. Can be controlled by software such as Madrix, Lumenair and HuiGuan APP.





Free connection Easy to adapt

Connect through network port, connect through DMX port, connect through WIFI. A variety of connection methods to choose from, randomly respond to a variety of occasions



LumenRadio Signaler E360 Technical Parameter

Name	LumenRadio Signaler E360
Voltage	5V 2A 12V 1A
Power source	5V type C port power supply, 12V round port power supply or 14.8V V port battery power supply
Shell material	PC+ABS plastic
Product size	255*86*42mm
Connection method	Ethernet port, wired DMX port or WIFI

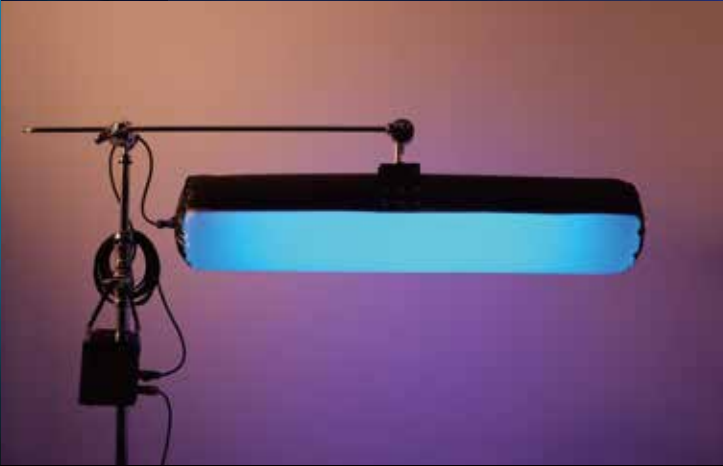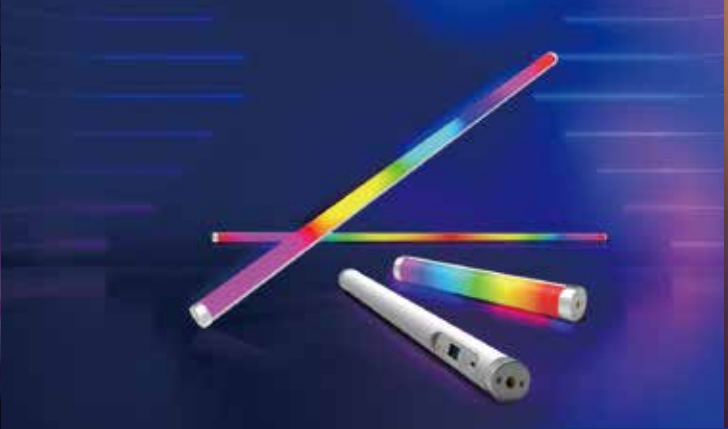

**Pay attention to us,
know more product information!**

